

KRAMER & DUYVIS

Curved conveyor systems - Components
Kramer & Duyvis B.V.


Spuiweg 24
5145 NE Waalwijk
The Netherlands

[T] +31(0)85 3301140
[F] +31(0)85 3301149
sales@kramer-duyvis.com
www.kramer-duyvis.com

KvK : 63756161
VAT nr : NL855386733B01
Bank nr: ING 00.69.22.804
BIC : INGBNL2A
IBAN : NL49INGB0006922804

K&D KDC Configurator 360 Manual

Version 1.0

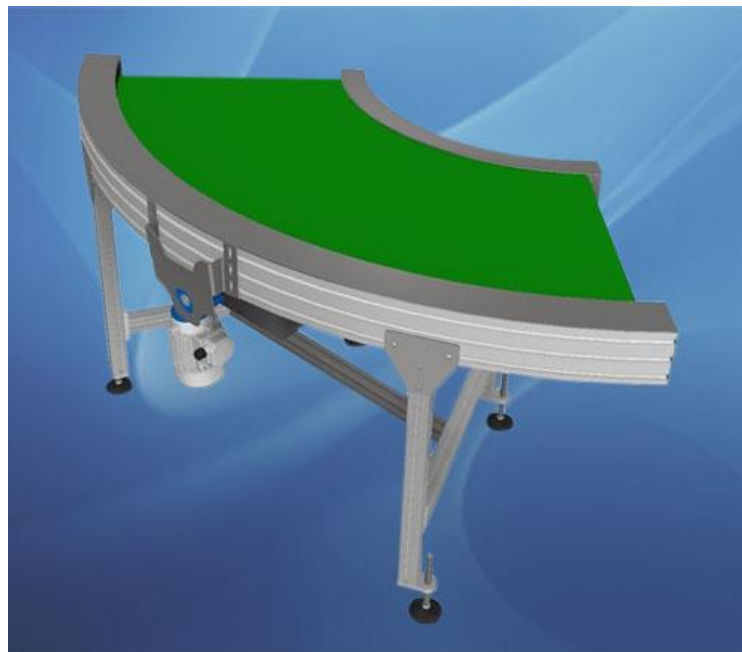

Inhoud

1. General.....	2
2. Accessibility Configurator	2
3. KDC Round conveyor Configurator	2
4. Configuration of the 3D model	3
5. Set Limits	4
6. Options configurator	5

1. General

The K&D Configurator 360 aims to quickly configure 3D models and download them for use in custom 3D designs.

The 3D models can be downloaded as STEP or SAT file.

It is also possible to request an advice or quotation of the configured model.

Standards were assumed when designing the configurator. There are many more options outside the standards. If you want a different belt color, the motor or legs of the support in a different location, shorter side guides, etc., please contact the sales department.

No rights can be derived from the configured models. Upon a quotation request, your configured model will be assessed by Kramer & Duyvis B.V.

2. Accessibility Configurator


The configurator is accessible from the K&D website where no registration or login is required. The direct link to the KDC configurator is: <https://www.kramer-duyvis.com/en/configurator-type-kdc> .

This is a combined KDC, KDZ, R100 and R150 configurator.

3. KDC Round conveyor Configurator

After you have clicked on the link you will be redirected to the K&D website.

If you do not see the configurator immediately, press F5 to refresh the page. The first loading time takes on average 10 to 20 seconds. On the left you will find the input screen by which you can configure the belt conveyor.

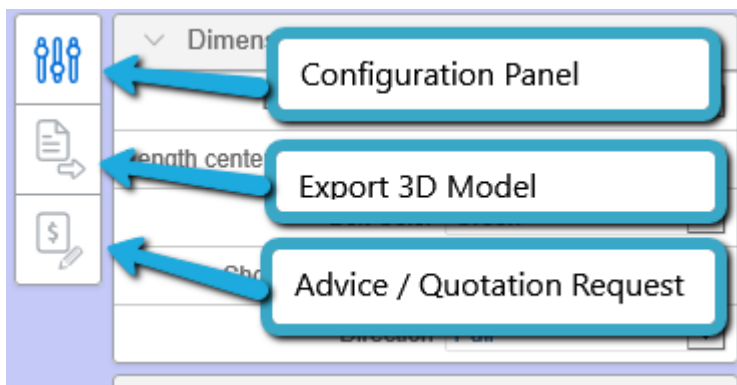


1. **Configuration panel**, Control panel, this is open by default. If you have exported a 3D model or have made an Advice / Quotation request, you can call up the configuration screen again via this button.
2. **Export 3D Model**, This allows you to export your configured model to a STEP or SAT file.
3. **Advice / Quotation Request**, if you want advice whether your configured model meets the requirements and / or you want a quote, you can do that via this button. The configured model is then saved so that Kramer & Duyvis can assess it.

4. Configuration of the 3D model

The fully expanded configuration screen looks like this:

Type Conveyor KDC ▼	
Dimensions	
Angle (deg)	90
Beltwidth (mm)	400
Outside Radius (mm)	1200
Inner Radius (mm)	800
Belt Color	Black ▼
Motor Type	MR60 ▼
R100 - R150 Motor Position	
Counter_Clockwise	<input type="checkbox"/>
Drive_Unit_Inside	<input type="checkbox"/>
KDC - KDZ Support	
Support	<input checked="" type="checkbox"/>
Height (mm)	800
KDC - R100 - R150 Side Guide	
Inner Side Guide	<input type="checkbox"/>
Inner Side Guide Height (mm)	100
Outer Side Guide	<input type="checkbox"/>
Outer Side Guide Height (mm)	100

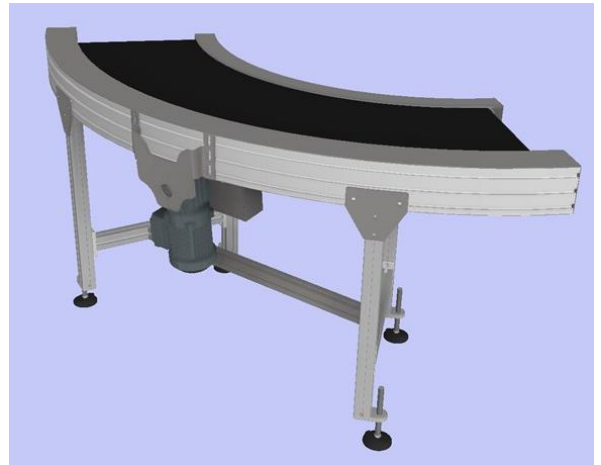

By making a choice from the drop-down menus or changing a value, the 3D model will be adjusted immediately. This takes around 1 to 10 seconds.

This direct adjustment is necessary because further options depend on the choices made.

Not all options are available for the KDC Type.

5. Set Limits

A number of rules have been set in the configurator according to our standards. Outside these standards, more is possible. If you are unable to configure your desired model due to limitations of the standards, please contact the sales department of Kramer & Duyvis B.V.

If you have a 3D Design program such as Autodesk Inventor Professional, you can also adjust the downloaded 3D models.

Below you will find the table with the minimum and maximum values that have been processed in the configurator.

Pay attention! If you enter a value outside the limits, it will be adjusted automatically. Always check the values displayed in the configuration panel before you export the model.

KDC Rules	Minimum (mm)	Maximum (mm)
Angle	25	180
Belt Width	200	1100
Outside Radius	600	3500
Inner Radius	300	3300
Length Profile		5600
Height Support	450	3000
Height Inner Guide	50	500
Height Outer Guide	50	500

6. Options configurator

A number of codes are being used in the configurator. Below you will find an explanation of what these codes mean.

The below outlined only explains what is present in this configurator. For more options and further information please visit our website or contact Kramer & Duyvis B.V.

Belt Width

Manual input 200 - 1.100 mm.

Angle

There are no standard angles. The angle can be accurately determined to the millimeter. Manual input from 25 to 180 degrees.

Belt colors

The following colors are available in the configurator:

- Black
- Blue
- Green
- White

Other colors available upon request.

Motorreductor options (also possible with forced cooling)

- MR10 Standard motorreductor 230/400V, 50 Hz, IP55
- MR60 SEW motorreductor, 230/400V, 50 Hz, IP54

Support

- LT22: H-formed aluminum profile construction